

TAC tube : PE-based

Further expand applications with excellent performance

- Easy to squeeze to confer an exquisite touch
- Body with excellent pressure resistance
- Cap variation considering application
- Supports a wide variety of applications.


<Usage record>

- Caulking agent • Glue • Putty • Oil • Grease • Paint • Abrasive • Mold remover etc.

Feature

- Ease to squeeze with a soft touch while maintaining strength
- Excellent pressure resistance
- The inner diameter of the mouth is as wide as 23φ, and filling work is smooth.
- 3 types to choose from depending on the contents
 - Single layer • Multilayer • High barrier

Multi-layer tube Diagram(4 types 5 layers)

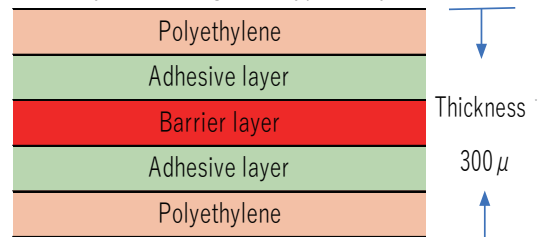

	Diameter	Single layer	Multilayer	High barrier	Mouth inner diameter	Length	Capacity guide	Cap
a	φ 90	—	◎	—	φ 23	250mm~340mm	1000cc~2000cc	ALL TYPES
b	φ 70	◎	◎	—	φ 23	170mm~310mm	500cc~1000cc	
c	φ 55	◎	◎	◎	φ 23	140mm~250mm	250cc~500cc	
d	φ 40	◎	◎	◎	φ 23	120mm~210mm	120cc~250cc	